



620

DOUBLE DIPPED, MEDIUM WEIGHT PVC GAUNTLET

Strong yet extremely soft and flexible, SHOWA 620 is a durable, double-dipped medium weight PVC glove that ensures grip and provides liquid-proof protection. The first working glove for which SHOWA obtained a seamless processing patent in 1980

FEATURES

- › Fully coated and chemical resistant with an extra coating of PVC over the hand
- › Double-dipped medium weight PVC coated
- › Good resistance to acids, alkalis and vegetable/ animal oils
- › Scalloped edge
- › Designed for easy movement and continuous wear
- › Seamless cotton liner
- › Rough textured finish enhances grip



SUITABLE FOR


Typical Industries

- Agriculture
- Chemical
- Construction
- Offshore
- Oil and Gas
- Public Utilities

Suitable Applications

- Commercial Fishing
- Chemical Handling
- Cleaning
- Fuel Transport
- Maintenance

CERTIFICATION



See overleaf for explanation



620

PRODUCT INFORMATION

| | | |
|--------------------|----------------------|--------|
| MATERIALS | LINER: | Cotton |
| | COATING: | PVC |
| COLOUR | Orange | |
| LENGTH (mm) | 300 (size dependent) | |
| CUFF STYLE | Gauntlet | |

ORDERING DETAILS

| SIZE | CODE | PACKAGING |
|--------|---------|---------------------------------------|
| 8/M | SHO6202 | 10 pairs per bag 60 pairs per case |
| 9/L | SHO6203 | |
| 10/XL | SHO6204 | |
| 11/XXL | SHO6205 | |
| | | |


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

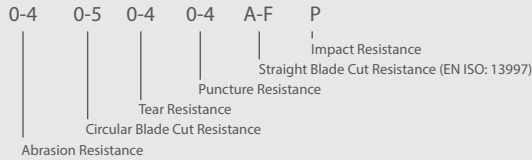

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604:2004 (method B)



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

| CODE | CHEMICAL | CODE | CHEMICAL | TYPE OF GLOVES | BREAKTHROUGH TIME |
|------|------------------|------|------------------------|----------------|----------------------------------|
| A | Methanol | J | n-Heptane | A | ≥30 min for at least 6 chemicals |
| B | Acetone | K | Sodium hydroxide 40% | | |
| C | Acetonitrile | L | Sulphuric acid 96% | B | ≥30 min for at least 3 chemicals |
| D | Dichloromethane | M | 65% Nitric acid | | |
| E | Carbon Disulfide | N | 99% Acetic acid | C | ≥10 min for at least 1 chemical |
| F | Toluene | O | 25% Ammonium hydroxide | | |
| G | Diethylamine | P | 30% Hydrogen peroxide | | |
| H | Tetrahydrofuran | S | 40% Hydrofluoric acid | | |
| I | Ethyl acetate | T | 37% Formaldehyde | | |

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2022 Globus (Shetland) Ltd | SHO-DATA-620_0722_1